




Declaration of **PERFORMANCE (DoP)**

12000 - FireFree Brandlukningssystem

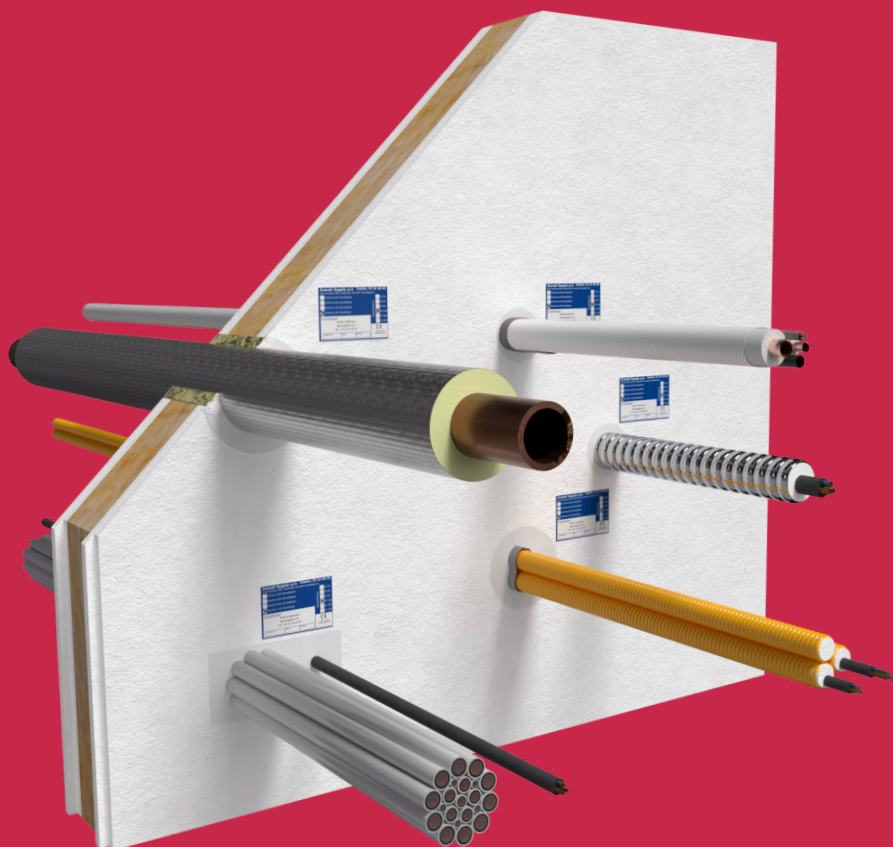

| | | |
|----|--|--|
| 1. | Unique Identification Code of the Product Type | FireFree 101 Brandfuge, FireFree 101 Brandfiller, FireFree 501 Brandplade FireFree 601 Brandplade, FireFree 602 Brandplade |
| 2. | Manufacturer | Scandi Supply A/S, Energivej 2, 5492 Vissenbjerg |
| 3. | Intended Use | Fire stopping product for use in penetration seals. |
| 4. | System for Assessment and Verification of Constancy of Performance | AVCP-System 1 |
| 5. | Basis of Assessment | EAD 350454-00-1104 |
| 6. | European Technical Assessment | ETA-25/0503, dated 2025/05/30 |
| 7. | Technical Assessment Body | ETA-Danmark A/S, Nordhavn |
| 8. | Notified Body | 0761 |
| 9. | Declared performance* | |


| *Essential characteristics | Performance | Technical Specifications |
|---|----------------------|--------------------------|
| Mechanical resistance and stability (BWR 1) | | |
| NPD | NPD | |
| Safety in case of fire (BWR 2) | | |
| Reaction to fire | Class E (EN 13501-1) | |
| Fire Resistance Class | ≤EI 240 | |
| Hygiene, health and environment (BWR 3) | | |
| Air Permeability | NPD | |
| Water Permeability [m/s] | NPD | |
| Content, Emission, and/or Release of Dangerous Substances | NPD | |
| Safety and accessibility (BWR 4) | | EAD 350454-00-1104 |
| Resistance to Impact/Movement [N/m ²] | NPD | |
| Adhesion | NPD | |
| Durability-Serviceability | Use category type X | |
| Protection against noise (BWR 5) | | |
| Airborne Sound Insulation [Rw] | NPD | |
| Energy economy and heat retention (BWR 6)) | | |
| Thermal Insulation Properties | NPD | |
| Water Vapor Diffusion Resistance Factor [μ] | NPD | |
| Sustainable use of natural resources (BWR 7) | | |
| NPD | NPD | |

The performance of the product identified above is in conformity with the set of declared performances. This declaration of performance is issued, in accordance with Regulation (EU) No. 305/2011, under the sole responsibility of the manufacturer identified above.

Vissenbjerg 2025/08/25

Signed for and on behalf of the manufacturer by:

CTO
Rasmus Brylle



The manufacturer's specifications regarding use and installation must be strictly observed.
DoP online available at www.scandisupply.dk